NOTES

- EXISTING WALL LIGHT FITTING
- FIRE ALARM CALL POINT
- NO SMOKE ON SOUNDS
- MR 16 LIT SPOTLIGHT
- MR 16 LIT DIRECTIONAL SPOTLIGHT
- FUSED SPUR
- SWITCH DIMMER

GENERAL NOTES

- ORIGINAL FLOORING TO BE EXPOSED LOCAL REPAIRS OR MATCH EXISTING WHERE NEEDED
- REUPHOLSTER ALL FIXED SEATING
- UPGRADE ELECTRICAL INSTALLATION THROUGHOUT
- NEW HEATING THROUGHOUT

(12) OUTER ENTRANCE DOOR TO BE KEPT OPEN DURING TRADE HOURS

(13) REMOVE EXISTING DOOR AND REPLACE WITH NEW ENTRANCE DOOR

(14) REMOVE PILLAR BELIEVED STRUCTURAL ENGINEER REPORT

(15) REMOVE GAS FIREPLACES AND MAKE GOOD ORIGINAL

(16) RETAIN EXISTING WALL FINISH THROUGHOUT AND REPAINT WITH A COLOUR FROM A HERITAGE PAINT RANGE SUCH AS FUDGE OR LITTLE GREENE. PAINT COLOUR TO BE SYMPATHETIC TO BUILDING

(16) ORIGINAL FLOORING TO BE EXPOSED THROUGHOUT. LOCAL REPAIRS OR MATCH EXISTING WHERE NEEDED

(17) INSTALL NEW JOINERY SCREENS OFFSET FROM ORIGINAL WALL FINISH

(18) NEW MIX SHELF SYSTEM FIT ON EXISTING SHELVING

(19) NEW FIRE PANEL IN ENTRANCE

(20) REFURBISH CUSTOMER TOILETS WITH NEW FUNGI, FLOORING AND SANITAWARE THROUGHOUT

(21) INSTALL NEW BEER STORAGE AND PITHEON

(22) NEW HANDRAIL TO REPLACE EXISTING ROPE, BRACKETED DIRECT TO MORTAR JOINTS

(23) BAR COUNTER EXTENSION TO MATCH EXISTING

(24) REFURBISH FRONT BAR TO MATCH EXISTING

(25) REFURBISH BACK BAR TO MATCH EXISTING

(26) EXISTING MIRROR IN BALUS TO BE REMOVED AND RELOCATED TO BASEMENT

(27) PROPOSED ROUTE FOR NEW BEER PITCHON UNDER FLOOR

(28) REFURBISH AND REINSTATE SIGNAGE AND MENU BOX TO MATCH EXISTING

(29) NEW FLOOR MOUNTED LOW LEVEL RADIATORS

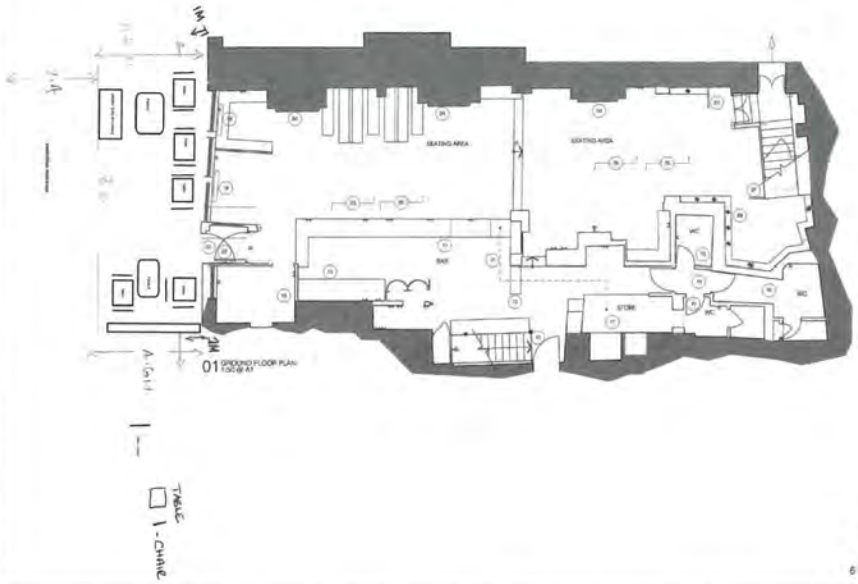

01 GROUND FLOOR PLAN
1:50 @ A1

0 1 5

6 MARTIN LANE, LONDON, EC4R 0DP

No	Date	Revision
F	07.02.16	FIRST ISSUE
A	10.02.16	PLANNING ISSUE. REVISION TO NOTES
B	15.06.16	MINOR INFORMATION ADDED
C	16.07.16	PLANNING ISSUE
D	22.08.16	AMENDMENTS TO PLANNING ISSUE
E	17.10.16	KINGSTATION AMENDEMENTS TO PLANNING ISSUE

PLANNING ISSUE

A1

CENTRAL DESIGN STUDIO

PROJECT TITLE: 6 MARTIN LANE, LONDON

DRAWING: PROPOSED GROUND FLOOR GA

DATE	DRAWN / CHECKED	SCALE
28.06.16	TJ/BRH	1:50 @ A1
PROJECT	DATE	NUMBER
6311	1216	E